

M34 SLD G

SPECIFICATIONS

| | |
|------------------------------|------------------------------------|
| Nominal Voltage (V) | 12V |
| Capacity at C/100 | 70 Ah |
| Capacity at C/20 | 60 Ah |
| Capacity at C/5 | 47.5 Ah |
| Weight | 39 lbs. (17.7 kg) |
| Plate Alloy | Lead Calcium |
| Posts | Forged Terminals & Bushings |
| Container/Cover | Polypropylene |
| Operating Temperature Range | -76°F (-60°C) - 140°F (60°C) |
| Charge Voltage @ 77°F (25°C) | |
| Cycle | 13.8 - 14.6 volts |
| Float | 13.4 - 13.6 volts |
| Vent | Self-sealing |
| Electrolyte | Sulfuric acid thixotropic gel |
| Terminal | C (Insert w/ 1/4" - 20 round hole) |



Rated non-spillable by ICAO, IATA and DOT

Made in the U.S.A. by East Penn Manufacturing Co, Inc.

Valve-Regulated, Gelled-Electrolyte Battery




DIMENSIONS

Inches (mm)

| | |
|--------|----------------|
| Length | 10.20 (259 mm) |
| Width | 6.65 (169 mm) |
| Height | 7.05 (179 mm) |

**Gel Cycle Life vs Depth of Discharge at +25°C (77°F)
Based on BCI 2-hour Capacity**

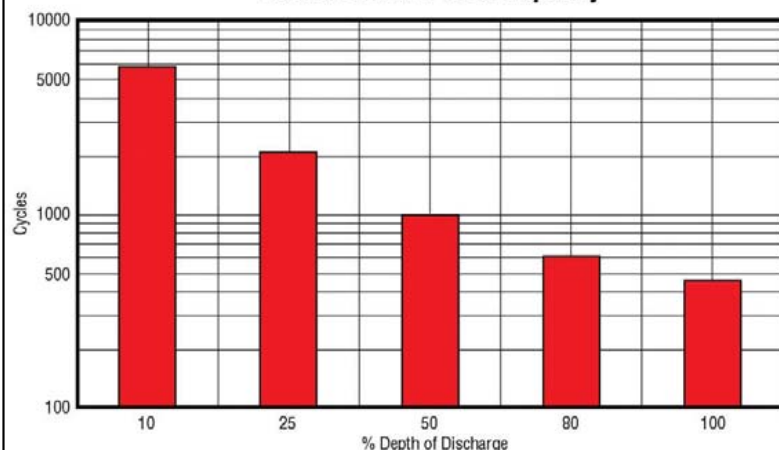

Vertrieben durch:



EMG Elektromobile GmbH & Co. KG

Beerenstraße 5 · D-33803 Steinhagen / Westf.

Telefon: 0 52 04 / 8 71 90 - 0 · Telefax: 0 52 04 / 8 71 90 - 20

info@emg-elektromobile.com · www.emg-elektromobile.com

